



PERSONAL
COMPUTERS

iPlug

600-800 VA single-phase

iPlug 600-800 VA



The **IPLUG** series is the ideal solution for household, and small home office systems. Its compact size and versatility - push-button operation, LED status panel and user-replaceable batteries - make **IPLUG** easy to install within a domestic environment to protect systems from surges and blackouts. When mains power fails the load is powered by the inverter and built-in battery. **PowerShield³** UPS monitoring and control software (available for download from www.riello-ups.com) can be used for an orderly unattended shutdown of IT systems.

LOAD CONFIGURATOR

Load type	Power (VA)*
Personal computer	250
LCD Monitor	70
15" Monitor	150
Scanner, printer	200
Modem, TV, DVD reader, PlayStation, Hi-Fi, Phone, Fax	50
Laser printer**	200

*Average estimated value. **Use the iPLUG filtered power output.

FEATURES

- ECO LINE energy efficient product
- Compact, ergonomic design
- 5 sockets with battery backup
- 3 sockets with surge protection only
- Cold start capability to power up the UPS without mains power
- User replaceable batteries
- USB interface for remote monitoring
- Power cable included
- Protection from short-circuits
- Auto restart - when the mains returns after battery exhaustion
- GS/Nemko safety marking
- Available with French (2P+E), English, Schuko and Italian outlets.

ADVANCED COMMUNICATION

- **PowerShield³** supervision and shut-down software for Windows 7, 2008, Vista, 2003, XP, Linux, Mac OS X and Sun Solaris operating systems
- Plug and Play function.

2 YEAR WARRANTY




Tel: 01420 82031

Fax: 01420 82068


sales@mpowerups.co.uk

service@mpowerups.co.uk

MODELS	iPlug 600	iPlug 800
POWER	600VA/360W	800VA/480W
INPUT		
Rated voltage	220-240 Vac	
Voltage range	230 Vac (+20/-25%)	
Frequency	50/60 Hz with auto sensing	
OUTPUT		
Voltage on mains operation	230 Vac (+20/-25%)	
Voltage on battery operation	230 Vac (+/- 10%)	
Frequency on battery operation	50 or 60 Hz (+/- 1%)	
BATTERIES		
Type	VRLA AGM Maintenance-free lead-acid	
Recharge time	6-8 h	
ENVIRONMENTAL		
Net weight (kg)	3.7	4.1
Gross weight (kg)	4	4.4
Dimensions (hwd) (mm)	99 x 175 x 313	
Packaging dimensions (hwd) (mm)	260 x 380 x 140	
Communication	USB	
Compliance	EN 62040-1-1 and Directive 2006/95/EC; EN 62040-3 EN 62040-2 and Directive 2004/108 EC	
Marks	CE; GS/NEMKO on Schuko version	
Operating temperature	0°C / +40°C	
Colour	Black	
Altitude and relative humidity	6000 meters max. elevation, <95% non condensing	
Accessories provided	1 input supply cable, user guide	

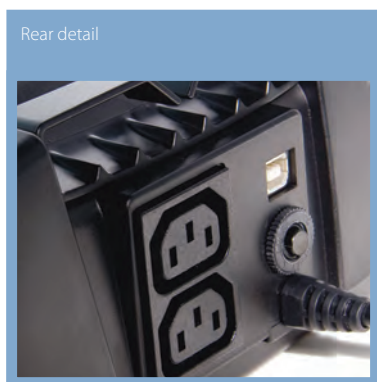

iPlug 600 - iPlug 800

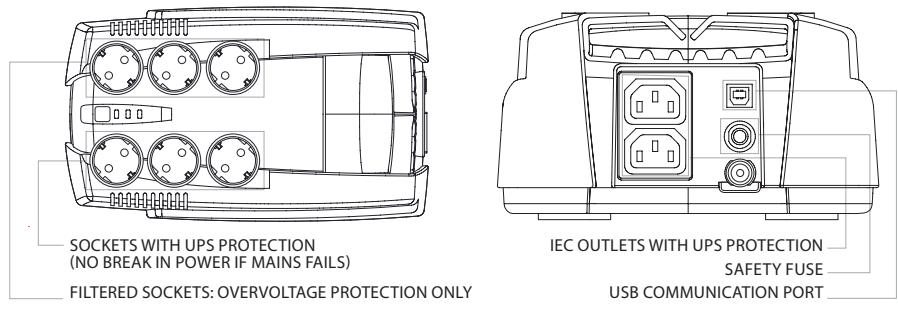

TECHNICAL DETAILS



AVAILABLE SOCKETS

SCHUKO SOCKET CEE 7/7P	FRENCH SOCKET CEE 7/5	ITALIAN SOCKET CEI 23/16	BRITISH SOCKET BS1363A

